
Sirocco 1300

132,000 LUMEN | **9.4kg 20lb LIGHTWEIGHT** | **5,000 K DAYLIGHT COLOR**



Lighting data

Light Engine	Airstar LED Matrix: 24 x 5 500 lm
Maximum lumen	132,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	704 lx - 65 fc

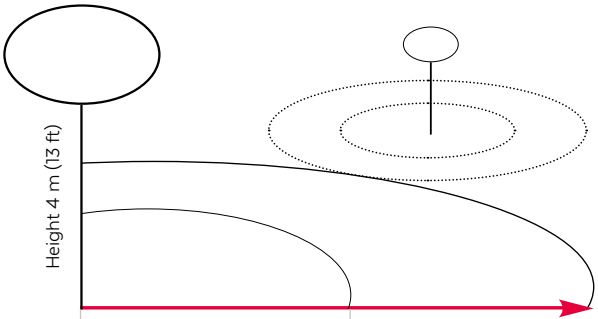

Light	5 lx	0.5 lx
Radius	25 m - 82 ft	45,5 m - 149 ft
Surface	1,963 m² 21,129 ft²	6,500 m² 69,965 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0.5 lx) ***

Weight and dimensions

Net weight of the balloon	9.4 kg - 20 lb
Envelope size	ø 138 cm / h 77 cm ø 54 in / h 30 in

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9.2 m/30 ft), 1x quick-start guide, 1x envelope repair patch kit

Transport bag	108 x 30 x 30 cm (L*w*h) 42 x 11 x 11 in (L*w*h)
Transport gross weight	Less than 16.5 kg (36 lb)

Recommended accessories

Stand 5 m	Height from 140 cm (55 in) to 480 cm (181 in) Weight 13.5 kg (30 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommended purchase x3 per stand

Main options

Envelop variants: Lenticular, Sirflex (for permanent or semi-permanent use), reversed reflector, personalised with your logo, red top colour modifiable

Technical data

Wind resistance of the balloon	100 km/h - 60 mph
Power consumption	920 W
Efficiency	143 lm/W 14,042 lm/kg - 6,373 lm/lb
Voltage	100-240 VAC / 50-60 Hz
Recommended generator	2 kVA
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109.3 yd

4 light animations available

AIRSTAR LIGHT — Available on the App Store — ANDROID APP ON Google Play

IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope