

Sirocco 700

66,000 LUMEN | 6.5kg 14lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR

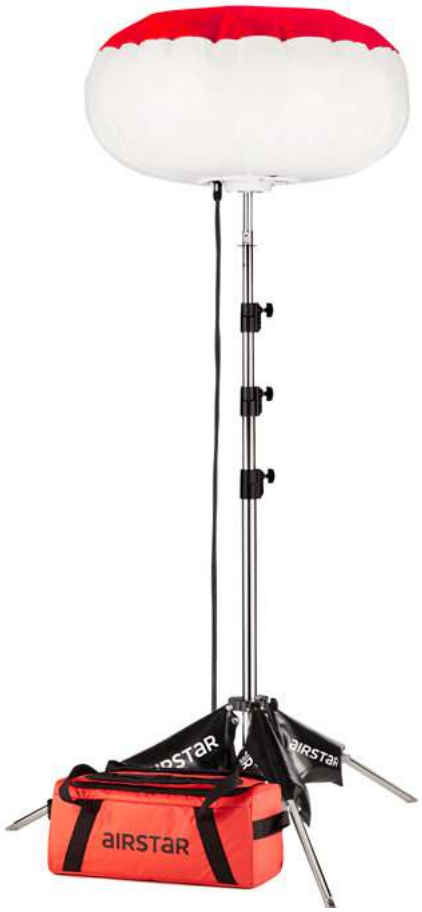

Lighting data

Light Engine	Airstar LED Matrix: 12 x 5 500 lm
Maximum lumen	66,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (4 m - 13 ft high)	452 lx - 41 fc

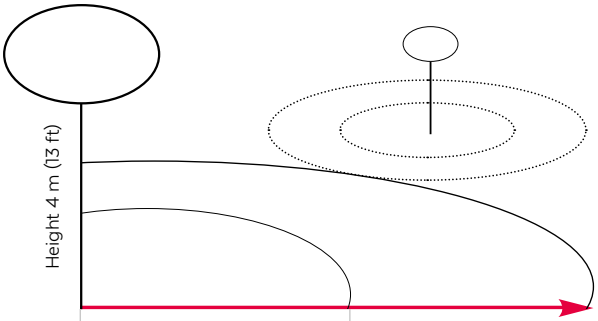

Light	5 lx	0.5 lx
Radius	15 m - 42.2 ft	32 m - 111.5 ft
Surface	707 m² 7,610 ft²	3,216 m² 34,616 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0.5 lx) ***

Weight and dimensions

Net weight of the balloon	6.5 kg - 14 lb
Envelope size	ø 100 cm / h 50 cm ø 39 in / h 19 in

Packaging

Included in the transport bag:
Full set lighting balloon with 1x standard envelope (without stand), 1x power cord (9.2 m/30 ft), 1x quick-start guide, 1x envelope repair patch kit

Transport bag	86 x 30 x 30 cm (L*w*h) 33 x 11 x 11 in (L*w*h)
Transport gross weight	Less than 13 kg (29 lb)

Recommended accessories

Stand 5 m	Height from 140 cm (55 in) to 480 cm (189 in) Weight 13.5 kg (30 lb)
Sandbag	Weight (with sand): 12 kg - 26 lb Recommended purchase x3 bags per stand

Main options

Envelop variants: Lenticular, reversed reflector, personalised with your logo, red top colour modifiable

Technical data

Wind resistance of the balloon	100 km/h - 60 mph
Power consumption	500 W
Efficiency	132 lm/W 10,153 lm/kg - 4,605 lm/lb
Voltage	100-240 VAC / 50-60 Hz
Recommended generator	1 kVA
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109.3 yd

4 light animations available

AIRSTAR LIGHT | Available on the App Store | ANDROID APP ON Google Play

IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope