Sirocco 300
ProPack


20,500 LUMEN | 2.3kg 5.0lb LIGHTWEIGHT | 5,000 K DAYLIGHT COLOR | 12 hrs





Lighting data

Light Engine	Airstar LED Matrix : 4 x 5 125 lm
Maximum lumen	20,500 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (2.2 m - 7.2 ft high)	345 lx - 32 fc

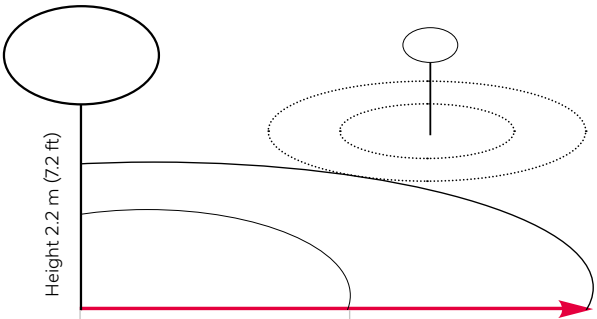

Light	5 lx	0.5 lx
Radius	8 m - 26 ft	18 m - 59 ft
Surface	201 m² 2,163 ft²	1,017 m² 10,946 ft²
Standard	Very low risk area lighting requirement for safety and security EN 12464-2 (5 lx)	Open core area lighting requirement EN 1838 (0.5 lx) ***

Technical data

Wind resistance of the balloon			80 km/h - 50 mph
Power consumption			160 W
Efficiency			138 lm/W 8,148 lm/kg - 3,728 lm/lb
Battery voltage			52 V
Mode	Full	Efficient	Eco
Battery life	4 h	6.5 h	12 h
Recommended battery	830 Wh (16 Ah) / 52 V		
Certifications	IEC-60598-1, CE, IP54		
Flame-retardant fabric			

Weight and dimensions

Net weight of the balloon	2.3 kg - 5 lb
Envelope size	ø 60 cm / h 37 cm ø 23 in / h 15 in
Telescopic column	Up to 2,20 m (7.2 ft) Weight 1.6 kg (3.5 lb)

Packaging

Included in the transport case:
Full set lighting balloon with 1x standard envelope with telescopic column, 1x 52V battery, 1x battery charger, 1x quick-start guide, 1x envelope repair patch kit, 1x connecting cable

Transport case	67 x 51 x 26 cm (L*w*h) 26 x 20 x 10 in (L*w*h)
Transport gross weight	Less than 23 kg (50 lb)

Accessories & Main options

Envelop variants: Lenticular, reversed reflector, personalised with your logo, red top colour modifiable

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109.3 yd

4 light animations available

AIRSTAR LIGHT | Available on the App Store | ANDROID APP ON Google Play

MADE IN FRANCE | CE | CONTRÔLE QUALITÉ DE TOUS LES PRODUITS | IP54

* Under normal conditions of use ** Lenticular Envelope *** Standard Envelope